
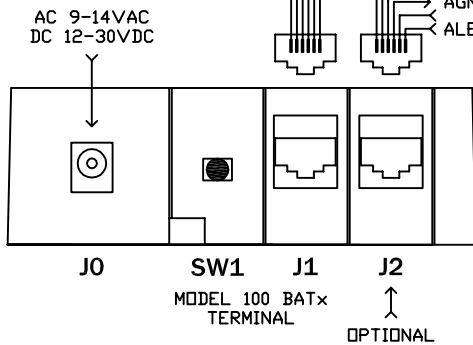
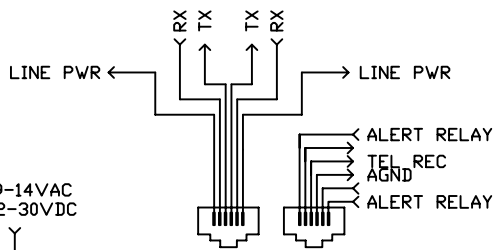

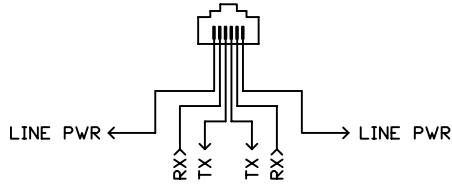


REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
------	-----	-------------	------	----------



SELF TEST MODE

ADJUST VOLUME FOR 10 O'CLOCK POSITION

SWITCH 1 PRESENT
SIMULTANEOUSLY DEPRESS SWITCH 1 AND PTT ON
HANDSET WHILE SPEAKING INTO HANDSET MIKE (HTX),

SWITCH 1 ABSENT
SIMULTANEOUSLY DEPRESS HOOKSWITCH AND PTT ON
HANDSET WHILE SPEAKING INTO HANDSET MIKE (HTX),

SPOKEN AUDIO WILL EMANATE FROM THE
INTERNAL SPEAKER IN THE ENCLOSURE BASE AND
THE RX RECEIVER IN THE HANDSET



JUMPERS
OK1100R0

JMP1	1 0 2 0 3 0	RX LEVEL -8dBm RX LEVEL -4dBm	JMP2	1 0 2 0 3 0	TX LEVEL -8dBm TX LEVEL 0dBm
JMP3	1 0 2 0 3 0	HTX GAIN +40dB HTX GAIN 0dB	JMP4	1 0 2 0 3 0	VOLUME = 0V VOLUME = MIN
JMP7	1 0 2 0 3 0	VOX RELAY NC VOX RELAY NO	JMP9	1 0 2 0 3 0	TXOUT PTT EN TXOUT HKSW EN

SPECIFICATIONS

HEIGHT:	5.25"	(133.4mm)
WIDTH:	7.63"	(193.8mm)
DEPTH:	8.5"	(215.9mm)
WEIGHT:	2.25#	(1.02kg)
POWER:	9-14 VAC, 12-30VDC	
CURRENT:	350mA MAX	
OPERATING TEMP:	40-100°F (4-38°C)	
RECEIVE LEVEL:	-4dBm, -8dBm	
TRANSMIT LEVEL:	0dBm, -8dBm	
FREQ. RESPONSE:	300HZ-3KHZ +/- 2dB	
LINE PORT PWR:	12-30VDC (.5A min)	

R39=SENSITIVITY.....R35=ALERT RELAY.....R33=ALERT LAMP



OKphone, LLC

BASIC AUDIO TERMINAL W/VOX-ALERT
MODEL 150

SIZE	FSCM NO.	DWG NO.	REV
SCALE	03-18-15	68-150	0
DON KELLEY		SHEET 1 OF 1	